


DP50 6000 SERIES

SINGLE HUNG | DOUBLE HUNG
FIXED PICTURE | SLIDER

High impact protection. High impact style. Engineered to perform to some of the toughest weather-related standards, providing safety, strength, and peace of mind...anywhere you call home.

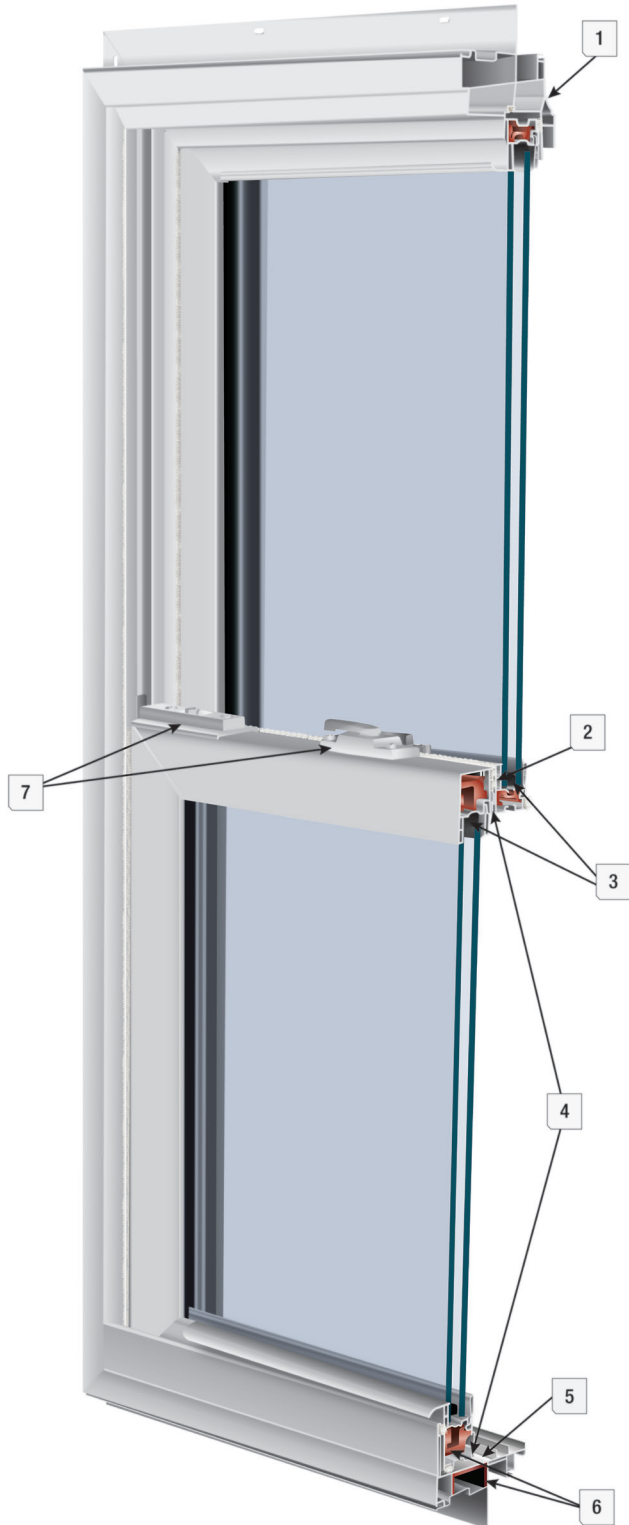

FEATURES

- 1 3¼" Beveled Exterior Main-Frame Includes Integral Nailing Flange and Masonry Clip Receiver for Installation Flexibility
- 2 Patented Sash to Frame Interlock to Help Keep Sashes Secure in High Wind Conditions
- 3 Quanex Building Products Most Advanced Warm Edge Spacer Duralite®
- 4 Multi-Point Weather Seal System
- 5 Sloped Sill Configurations for Multiple Architectural Applications
- 6 Impact Resistant Fully Reinforced Sashes and Main-Frame
- 7 High Performance Structural Design with Industrial Strength Hardware to Help Provide Superior Break-In Resistance Over Standard Window Systems
- 8 Product Rating-H-R50 1219X1829, Referenced Standard AAMA/WDMA/CSA 101/IS2/A440-05
- 9 Multi-Chambered Sashes and Main-Frame

STANDARD


- Sunshield® Virgin Vinyl
- Patented Fusion Welded Frame and Sashes
- Constant Force Balance System

NFRC TEST RATINGS

MODEL	U-FACTOR	SHGC
6000 PW	.27	.27
6000 SH	.29	.26
6000 DH	.30	.25
6000 SS	.29	.26

**Ratings supplied with DS CS 36/Duralite®/Argon/Grids

Constant Force Balance System



SCAN the Code to
Review Structural Ratings.



Available Colors

